


© All rights in and to this material are the sole property of ASSA ABLOY Entrance Systems AB.
 Copying, scanning, alterations or modifications are expressly forbidden without the prior written consent of the applicable company within ASSA ABLOY Entrance Systems AB.
 Rights reserved for changes without prior notice.

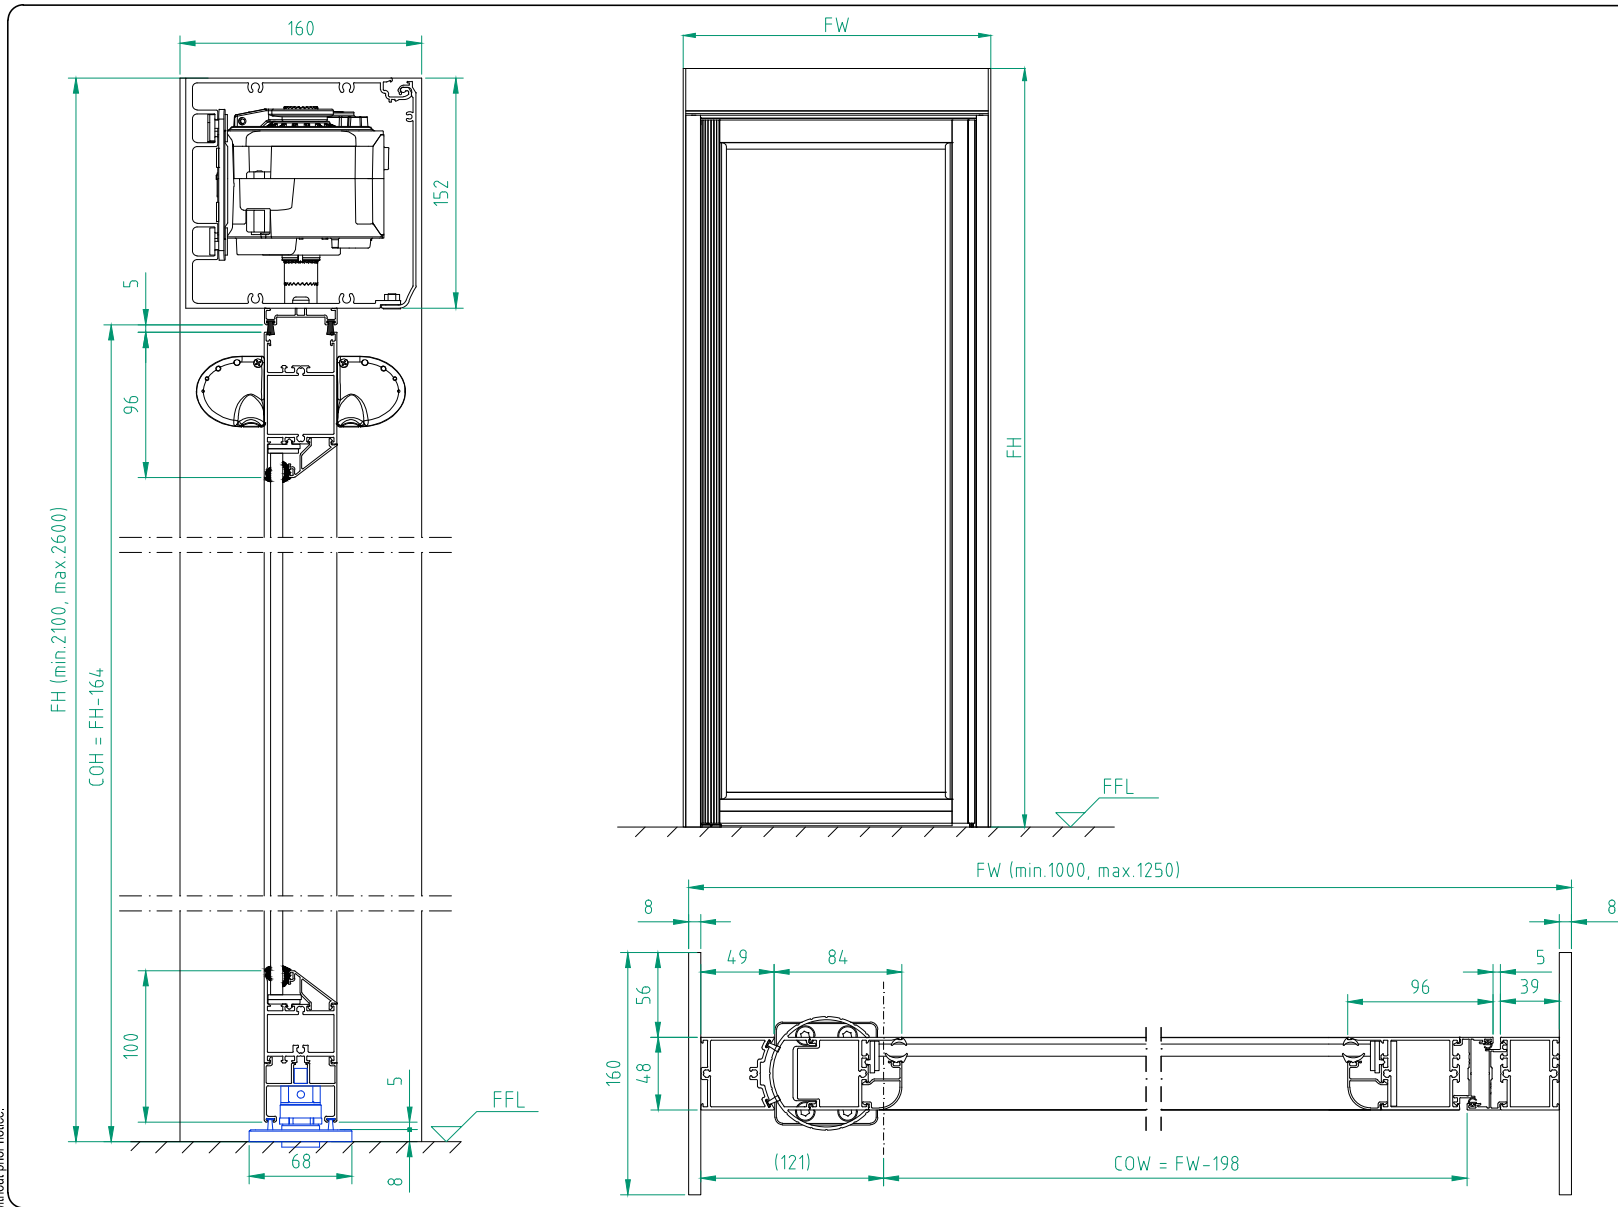

State when ordering
 FW=.....mm
 FH=.....mm
 COW=.....mm
 COH=.....mm

- Options see layers**
- Without threshold
 - With threshold
 - Midrail 70, MH=.....mm
 - Midrail 150, MH=.....mm
 - Bottom rail
 - Top rail

Surface treatment

- Silver anodized
- Special anodized.....
- RAL.....
- Special powder coating
-

- Glass**
 - 6 mm laminated glass
 - 8 mm laminated glass
 - 10 mm laminated glass
 - 22 mm insulated glass
 - 40 mm insulated glass
- Infill panel (alternative to glass)**
 - 8 mm
 - 22 mm
 - 40 mm
- Combination of glass and infill panel**

Note: Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness, 6 or 10 mm glass will generate 8 mm panel

- Lock**
- Lock Euro cylinder
 - 2xLock Euro cylinder
 - Lock ASSA
 - Lock Adams rite

- Handle**
- Handle, inside
 - Handle, outside
 - No handle

Customer: _____

Door id: _____

Project No: _____

Ref: _____

Date: _____

Sign: _____

Swing Door System
ASSA ABLOY SW200 I (Integra)
Single Left
Art. No. 1016268

ASSA ABLOY

2.0
1016460-EI