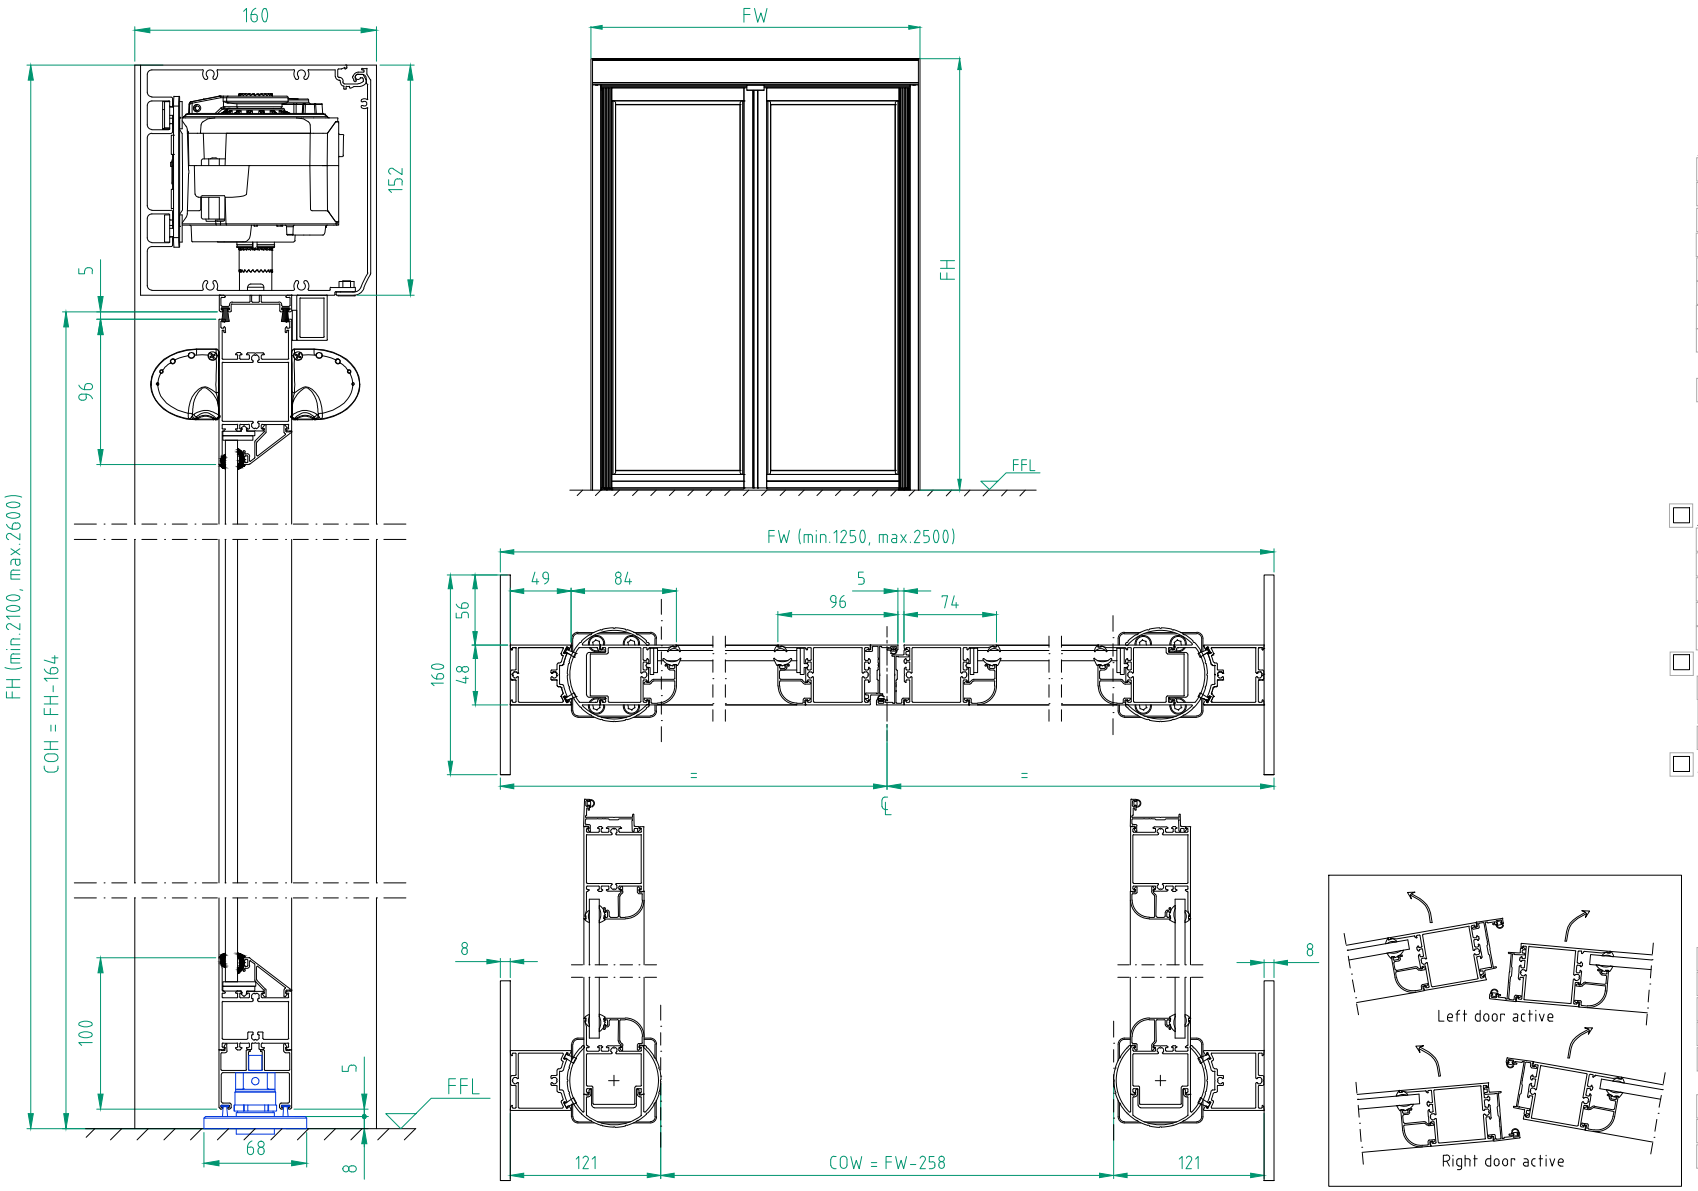

State when ordering

FW=.....mm
FH=.....mm
COW=.....mm
COH=.....mm

Options see layers

- ☐ Without threshold
- ☐ With threshold
- ☐ Midrail 70, MH=.....mm
- ☐ Midrail 150, MH=.....mm
- ☐ Bottom rail
- ☐ Top rail
- ☐ Left door active
- ☐ Right door active

Surface treatment

- ☐ Silver anodized

Special anodized.....
RAL.....
Special powder coating
.....

☐ *Glass*

- ☐ 6 mm laminated glass
- ☐ 8 mm laminated glass
- ☐ 10 mm laminated glass
- ☐ 22 mm insulated glass
- ☐ 40 mm insulated glass

☐ *Infill panel (alternative to glass)*

- ☐ 8 mm
- ☐ 22 mm
- ☐ 40 mm

☐ *Combination of glass and infill panel*

Note: Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness, 6 or 10 mm glass will generate 8 mm panel

Lock

- ☐ Lock flush bolt
- ☐ Lock Euro cylinder
- ☐ 2xLock Euro cylinder
- ☐ Lock ASSA
- ☐ Electric strike withdead bolt

Handle

- ☐ Handle, inside
- ☐ Handle, outside
- ☐ No handle

Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Swing Door System
ASSA ABLOY SW200 I (Integra)
Double Door
Art. No. 1016421

ASSA ABLOY

2.0 | 1016487-EI

© All rights in and to this material are the sole property of ASSA ABLOY Entrance Systems AB.
Copying, scanning, alterations or modifications are expressly forbidden without the prior written consent of the applicable company within ASSA ABLOY Entrance Systems AB.
Rights reserved for changes without prior notice.